

RAD SINGLE SPEED 15DX



Part Number: **17328**



LIGHTER FASTER STRONGER

More than 30 years of experience in gearbox engineering and design has brought about our latest generation in planetary gearboxes – RAD Single Speed. Designed for extreme duty use in a variety of industries worldwide.

SPECIFICATIONS

Torque Ranges: 300 ft. lbs. – 1500 ft. lbs.

Speed: 10 RPM

Weight: 8.6 lbs.


Square Drive: 1.0"

Noise Level: 80 dB

Repeatability: +/-2%

Accuracy: +/-4%

DIMENSIONS

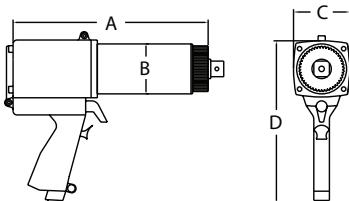

DIMENSION A	DIMENSION B	DIMENSION C	DIMENSION D
8.0"	2.7"	2.75"	8.1"



Non
Impacting



Safe &
Reliable



Class 1 Division
2 Group A, B,
C, D T4



Accredited
ISO/IEC 17025

Included Tool Holder

With FRL unit, 12' hose and fittings



SUITABLE REACTION ARMS

Standard

PN: 17375



Deep Socket

PN: 18480



Double Ended Arm

PN: 19094



Blank

PN: 17888



Double Ended Blank

PN: 19093



Retaining Ring

PN: 17367



RAD SINGLE SPEED 20DX-M

Part Number: **19135**




LIGHTER FASTER STRONGER

More than 30 years of experience in gearbox engineering and design has brought about our latest generation in planetary gearboxes – RAD Single Speed. Designed for extreme duty use in a variety of industries worldwide.

SPECIFICATIONS

Torque Ranges: 400 Nm – 2000 Nm
Speed: 10 RPM
Weight: 4.0 Kg
Square Drive: 1.0"
Noise Level: 80 dB
Repeatability: +/-2%
Accuracy: +/-4%

DIMENSIONS

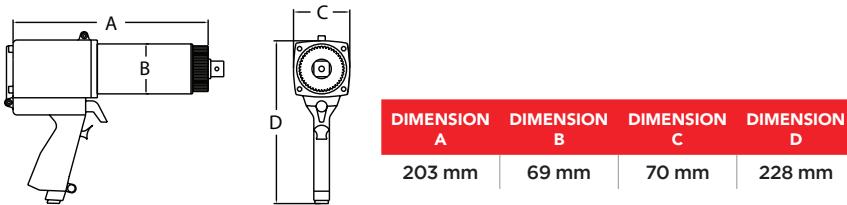

DIMENSION A	DIMENSION B	DIMENSION C	DIMENSION D
203 mm	69 mm	70 mm	228 mm



Non
Impacting



Safe &
Reliable



Class 1 Division
2 Group A, B,
C, D T4



Accredited
ISO/IEC 17025

Included Tool Holder

With FRL unit, 12' hose and fittings



SUITABLE REACTION ARMS

Standard
PN: 17375



Deep Socket
PN: 18480



Double Ended Arm
PN: 19094



Blank
PN: 17888



Double Ended Blank
PN: 19093



Retaining Ring
PN: 17367



NEW WORLD TECHNOLOGIES INC

#100 - 30722 MARSHALL RD | ABBOTSFORD, BC V2T 0H9 | CANADA
604.852.0405 | INFO@RADTORQUE.COM | RADTORQUE.COM