

RAD SINGLE SPEED 34GX



Part Number: **12356**



LIGHTER FASTER STRONGER

More than 30 years of experience in gearbox engineering and design has brought about our latest generation in planetary gearboxes – RAD Single Speed. Designed for extreme duty use in a variety of industries worldwide.

SPECIFICATIONS

Torque Ranges: 1000 ft. lbs. – 3400 ft. lbs.

Speed: 12 RPM

Weight: 20.0 lbs.


Square Drive: 1.0" or 1.5"

Noise Level: 85 dB

Repeatability: +/-2%

Accuracy: +/-4%

DIMENSIONS

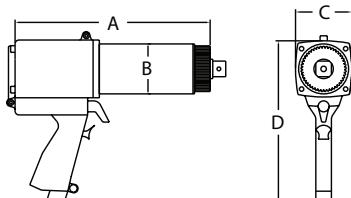

DIMENSION A	DIMENSION B	DIMENSION C	DIMENSION D
12.5"	3.4"	3.7"	10.8"



Non
Impacting



Safe &
Reliable



Class 1 Division
2 Group A, B,
C, D T4



Accredited
ISO/IEC 17025

Included Tool Holder

With FRL unit, 12' hose and fittings



SUITABLE REACTION ARMS

Standard

PN: 11531



Deep Socket

PN: 11534



Double Ended Arm

PN: 11533



Blank

PN: 11530



Double Ended Blank

PN: 11532



Retaining Ring

PN: 11350



RAD SINGLE SPEED 46GX-M

Part Number: **13571**



LIGHTER FASTER STRONGER

More than 30 years of experience in gearbox engineering and design has brought about our latest generation in planetary gearboxes – RAD Single Speed. Designed for extreme duty use in a variety of industries worldwide.

SPECIFICATIONS

Torque Ranges: 1400 Nm - 4600 Nm

Speed: 12 RPM

Weight: 9.0 Kg


Square Drive: 1.0" or 1.5"

Noise Level: 85 dB

Repeatability: +/-2%

Accuracy: +/-4%

DIMENSIONS



DIMENSION A	DIMENSION B	DIMENSION C	DIMENSION D
317 mm	86 mm	94 mm	274 mm



Non
Impacting



Safe &
Reliable



Class 1 Division
2 Group A, B,
C, D T4



Accredited
ISO/IEC 17025

Included Tool Holder

With FRL unit, 12' hose and fittings



SUITABLE REACTION ARMS

Standard

PN: 11531



Deep Socket

PN: 11534



Double Ended Arm

PN: 11533



Blank

PN: 11530



Double Ended Blank

PN: 11532



Retaining Ring

PN: 11350



NEW WORLD TECHNOLOGIES INC

#100 - 30722 MARSHALL RD | ABBOTSFORD, BC V2T 0H9 | CANADA
604.852.0405 | INFO@RADTORQUE.COM | RADTORQUE.COM