

RAD SINGLE SPEED 350SL



Part Number: **12316**



LIGHTER FASTER STRONGER

More than 30 years of experience in gearbox engineering and design has brought about our latest generation in planetary gearboxes – RAD Single Speed. Designed for extreme duty use in a variety of industries worldwide.

SPECIFICATIONS

Torque Ranges: 50 ft. lbs. – 350 ft. lbs.

Speed: 65 RPM

Weight: 6.0 lbs.


Square Drive: 0.75"

Noise Level: 80 dB

Repeatability: +/-2%

Accuracy: +/-4%

DIMENSIONS

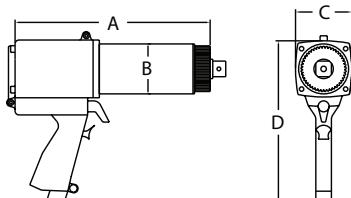

DIMENSION A	DIMENSION B	DIMENSION C	DIMENSION D
6.6"	2.4"	2.75"	8.75"



Non
Impacting



Safe &
Reliable



Class 1 Division
2 Group A, B,
C, D T4



Accredited
ISO/IEC 17025

Included Tool Holder

With FRL unit, 12' hose and fittings



SUITABLE REACTION ARMS

Standard

PN: 10686



Deep Socket

PN: 10687



Double Ended Arm

PN: 10688



Blank

PN: 10036



Double Ended Blank

PN: 10037



Retaining Ring

PN: 10306



RAD SINGLE SPEED 475SL-M

Part Number: **13573**



LIGHTER FASTER STRONGER

More than 30 years of experience in gearbox engineering and design has brought about our latest generation in planetary gearboxes – RAD Single Speed. Designed for extreme duty use in a variety of industries worldwide.

SPECIFICATIONS

Torque Ranges: 70 Nm – 475 Nm

Speed: 65 RPM

Weight: 2.7 Kg


Square Drive: 0.75"

Noise Level: 80 dB

Repeatability: +/-2%

Accuracy: +/-4%

DIMENSIONS



DIMENSION A	DIMENSION B	DIMENSION C	DIMENSION D
167 mm	61 mm	70 mm	222 mm



Non Impacting



Safe & Reliable



Class 1 Division 2 Group A, B, C, D T4



Accredited ISO/IEC 17025

Included Tool Holder

With FRL unit, 12' hose and fittings



SUITABLE REACTION ARMS

Standard

PN: 10686



Deep Socket

PN: 10687



Double Ended Arm
PN: 10688



Blank
PN: 10036



Double Ended Blank
PN: 10037



Retaining Ring
PN: 10306



NEW WORLD TECHNOLOGIES INC

#100 - 30722 MARSHALL RD | ABBOTSFORD, BC V2T 0H9 | CANADA
604.852.0405 | INFO@RADTORQUE.COM | RADTORQUE.COM