

E-RAD BLU 2500 COMP


Imperial Part No. 21981

SPECIFICATIONS

Torque Range Ft. lbs.: 250 - 2,500 Ft. lbs.
Torque Range Nm: 340 - 3,400 Nm
Speed: 10 RPM 230V
Weight: 7.6 Kg, excluding reaction arm & socket
Square Drive: 1"
Noise Level: 75 dB
Accuracy: +/- 2.8%
Repeatability: +/- 2%
Features: Torque and Angle function
Motor Type: Electric AC Servo motor
Metric Equivalent: E-RAD BLU 3400-M Part No. 21986



DIMENSIONS

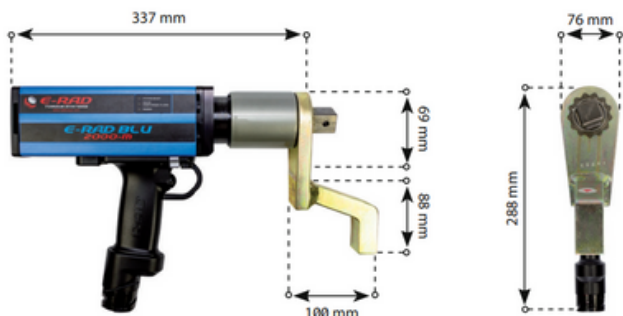

SAFETY

TOOL HANDLE/HANGER



PN: 19823

TWO HANDED SAFETY SWITCH



PN: 28795

TRIGGER GUARD FOR E-RAD



PN: 21899

REACTION ARMS

ANGLED  PN: 18863	ANGLED DEEP  PN: 18864	90 DEGREE  PN: 18250 (included in kit)
90 DEGREE DEEP  PN: 18251	DOUBLE ENDED  PN: 10516	RETAINING RING  PN: 10509 (included in kit)

INCLUDED

- E-RAD BLU 2500 COMP tool
- Reaction Arm (PN: 18250)
- Retaining Ring (PN: 10509)
- Control Box (PN: 21220)
- Controller cable 4.5m (longer options at request)
- Data logging software
- Instruction Manual and Safety Guide
- Calibration Certificate
- Weatherproof storage case



Adelaide (HQ)
 7 MAB Eastern Promenade
 Tonsley SA 5042
 (08) 8299 0355
sa@radicaltorque.com.au

Perth
 1/184 Railway Parade
 Bassendean WA 6054
 (08) 6118 2710
wa@radicaltorque.com.au

Brisbane
 25/121 Kerry Road
 Archerfield QLD 4108
 (07) 3063 9597
qld@radicaltorque.com.au

Mackay
 10 Peace Street
 Paget, QLD 4740
 (07) 4863 4625
mackay@radicaltorque.com.au

Thailand
 171/5 Soi On-nuch66, Suan Luang Suan
 Luan, Bangkok 10250, Thailand
 +66 (0)2 130 5208
thailand@radicaltorque.com